

10/534323  
Rec'd PCT/IB 03/04894  
09 MAY 2005

31.10.03



Europäisches  
Patentamt

European  
Patent Office

Office européen  
des brevets

REC'D 12 NOV 2003

WIBO DET

Bescheinigung

Certificate

Attestation

Die angehefteten Unterla-  
gen stimmen mit der  
ursprünglich eingereichten  
Fassung der auf dem näch-  
sten Blatt bezeichneten  
europäischen Patentanmel-  
dung überein.

The attached documents  
are exact copies of the  
European patent application  
described on the following  
page, as originally filed.

Les documents fixés à  
cette attestation sont  
conformes à la version  
initialement déposée de  
la demande de brevet  
européen spécifiée à la  
page suivante.

Patentanmeldung Nr. Patent application No. Demande de brevet n°

02079720.5

## PRIORITY DOCUMENT

SUBMITTED OR TRANSMITTED IN  
COMPLIANCE WITH RULE 17.1(a) OR (b)

Der Präsident des Europäischen Patentamts;  
Im Auftrag

For the President of the European Patent Office

Le Président de l'Office européen des brevets  
p.o.

R C van Dijk



Europäisches  
Patentamt

European  
Patent Office

Office européen  
des brevets

Anmeldung Nr:  
Application no.: 02079720.5  
Demande no:

Anmeldetag:  
Date of filing: 12.11.02  
Date de dépôt:

Anmelder/Applicant(s)/Demandeur(s):

Koninklijke Philips Electronics N.V.  
Groenewoudseweg 1  
5621 BA Eindhoven  
PAYS-BAS

Bezeichnung der Erfindung/Title of the invention/Titre de l'invention:  
(Falls die Bezeichnung der Erfindung nicht angegeben ist, siehe Beschreibung.  
If no title is shown please refer to the description.  
Si aucun titre n'est indiqué se référer à la description.)

Fingerprinting multimedia contents

In Anspruch genommene Priorität(en) / Priority(ies) claimed / Priorité(s)  
revendiquée(s)  
Staat/Tag/Aktenzeichen/State/Date/File no./Pays/Date/Numéro de dépôt:

Internationale Patentklassifikation/International Patent Classification/  
Classification internationale des brevets:

G10L/

Am Anmeldetag benannte Vertragsstaaten/Contracting states designated at date of  
filing/Etats contractants désignées lors du dépôt:

AT BE BG CH CY CZ DE DK EE ES FI FR GB GR IE IT LI LU MC NL PT SE SK TR

PHNL021150EPP

1

11.11.2002

Fingerprinting multimedia contents

**FIELD OF THE INVENTION**

The invention relates to a method and arrangement for extracting a fingerprint from a multimedia signal.

**5 BACKGROUND OF THE INVENTION**

Fingerprints, in the literature sometimes referred to as hashes or signatures, are binary sequences extracted from multimedia contents, that can be used to identify said contents. Unlike cryptographic hashes of data files (that change as soon as a single bit of the data file changes), fingerprints of multimedia contents (audio, images, video) are to a certain  
10 extent invariant to processing such as compression and D/A & A/D conversion. That is generally achieved by extracting the fingerprint from perceptually essential features of the contents.

A prior art method of extracting a fingerprint from a multimedia signal is disclosed in International Patent Application WO 02/065782. The method comprises the  
15 steps of extracting from the multimedia signal a set of robust perceptual features, and converting the set of features into the fingerprint. For audio signals, the perceptual features are energies of the audio contents in selected sub-bands. For image signals, the perceptual features are average luminances of blocks into which the image is divided. The conversion into a binary sequence is performed by thresholding, for example, by comparing each feature  
20 sample with its neighbors.

An attractive application of fingerprinting is content identification. The artist and title of a music song or video clip can be identified by extracting a fingerprint from a excerpt of the unknown material and sending it to a large database of fingerprints in which said information is stored.

25 Experiments have shown that the prior art method of extracting fingerprints from an audio signal is very robust against almost all commonly used audio processing operations, such as MP3 compression and decompression, equalization, re-sampling, noise addition, and D/A & A/D conversion.

It is quite common for radio stations to speed up audio by a few percent. They supposedly do this for two reasons. Firstly, the duration of songs is then shorter and therefore it enables them to broadcast more commercials. Secondly, the beat of the song is faster and the audience seems to prefer this. The speed changes typically lie between zero and four percent.

Speed changes of audio material cause misalignment in both the temporal and the frequency domain. The prior art fingerprint extraction method does not suffer from misalignment in the temporal domain, because the fingerprint is a concatenation of small sub-fingerprints being extracted from overlapping audio frames. A speed change of, say 2%, merely causes the 250<sup>th</sup> sub-fingerprint of an excerpt to be extracted at the position of the 255<sup>th</sup> sub-fingerprint of the corresponding original excerpt.

Misalignment in the frequency domain is caused by spectral energies shifting to other frequencies. The above example of 2% speedup causes all audio frequencies to increase by 2%. In the prior art audio fingerprint extraction method, this causes the energies in the selected sub-bands (and thus the fingerprint) to be changed. As a result thereof, the fingerprints can no longer be found in a database, unless a plurality of fingerprints corresponding to different speed versions are stored in the database for each song.

Similar considerations apply to image and video material and to other kinds of perceptual features being used for fingerprint extraction.

## OBJECT AND SUMMARY OF THE INVENTION

It is an object of the invention to provide an improved method and arrangement for extracting a fingerprint from multimedia contents. It is a particular object of the invention to provide a method and arrangement for extracting a fingerprint from an audio signal that is substantially invariant to speed changes of the audio signal.

To this end, the method of extracting a fingerprint from a multimedia signal in accordance with the invention comprises the steps of: extracting (12,13) from the multimedia signal a set of robust perceptual features; subjecting (15) the extracted set of features to a Fourier-Mellin transform; and converting (16,19) the transformed set of features into a sequence constituting the fingerprint.

The invention exploits the insight that the Fourier-Mellin transform consists of a log mapping and a Fourier transform. The log mapping converts scaling of the energy spectrum due to a speed change in a shift. The subsequent Fourier transform converts the shift into a phase change which is the same for all Fourier coefficients. Magnitudes of the

PHNL021150RPP

3

11.11.2002

Fourier coefficients are not affected by the speed change. A fingerprint derived from the magnitude or from the derivative of the phase of the Fourier coefficients is thus invariant to speed change.

## 5 BRIEF DESCRIPTION OF THE DRAWINGS

Fig. 1 shows schematically an arrangement for extracting a fingerprint from a multimedia signal or, equivalently, the corresponding steps of a method of extracting such a fingerprint according to the invention.

10 Figs. 2 and 3 show diagrams to illustrate the operation of a log mapping circuit, which is shown in Fig. 1.

## DESCRIPTION OF EMBODIMENTS

15 The invention will be described with reference to an arrangement for extracting a fingerprint from an audio signal, Fig. 1 shows schematically such an arrangement according to the invention.

20 The arrangement comprises a framing circuit 11, which divides the audio signal into overlapping frames of approx. 0.4 seconds and an overlap factor of 31/32. The overlap is chosen such that a high correlation between sub-fingerprints of subsequent frames is obtained. Prior to the division into frames, the audio signal has been limited to a frequency range of approx. 300Hz-3kHz and down sampled (not shown), so that each frame comprises 2048 samples.

25 A Fourier transform circuit 12 computes the spectral representation of every frame. In the next block 13, the power spectrum of the audio frame is computed, for example, by squaring the magnitudes of the (complex) Fourier coefficients. For each frame of 2048 audio signal samples, the power spectrum is represented by 1024 samples (positive and corresponding negative frequencies have the same magnitudes). The samples of the power spectrum constitute a set of robust perceptual features. The spectrum is not substantially affected by operations such as D/A & A/D conversion or MP3 compression.

30 After calculating the power spectrum, an optional normalization circuit 14 applies local normalization to the power spectrum. Such normalization (which includes de-convolution and filtering) improves the performance as it obtains a more decisive and robust representation of the power spectrum. Local normalization preserves the important characteristics of the spectrum and is robust against all kinds of the audio processing including local modifications of audio spectrum, such as equalization. The most promising

PHNL021150RPP

4

11.11.2002

approach is to emphasize the tonal part of the spectrum by normalizing it with its local mean. Mathematically, the normalized spectrum  $N(\omega)$  is obtained by dividing the spectrum  $A(\omega)$  by its local mean  $Lm(\omega)$  as follows:

$$N(\omega) = \frac{A(\omega)}{Lm(\omega)}$$

- 5 The local mean can be calculated in various ways, for example:

$$Lm(\omega) = \frac{1}{2\delta} \int_{\omega-\delta}^{\omega+\delta} A(\tau) d\tau \text{ (arithmetic mean), or}$$

$$Lm(\omega) = \exp \left[ \frac{1}{2\delta} \int_{\omega-\delta}^{\omega+\delta} \log A(\tau) d\tau \right] \text{ (geometric mean) and so on.}$$

- 10 The normalized spectrum remains invariant to equalization. Moreover, tonal information is directly related to human hearing and well preserved after most of the audio processing. The importance of tonal information is widely accepted and has been utilized in audio recognition and bit allocation of audio compression. Although local normalization has many advantages, the normalization is not consistent after compression if there are no tonal components between  $\omega-\delta$  and  $\omega+\delta$ . To mitigate this effect, integration over time and a total-energy term is added to  $Lm(\omega)$ . Then a modified local mean  $Lm'(\omega)$  is given as follows:

$$15 \quad Lm'(\omega) = \frac{1}{2\delta} \int_{t-\Delta}^t \int_{\omega-\delta}^{\omega+\delta} A(\tau) d\tau + \alpha \int_{t-\Delta}^t \int_{-\infty}^{\infty} A(\tau) d\tau$$

where  $\Delta$  and  $\alpha$  are constants, which are determined experimentally. Integration over time makes the normalization more consistent, and the total-energy term limits the increase of small non-tonal components after normalization.

- 20 The invention resides in the application of a Fourier-Mellin transform 15 to the power spectrum to achieve speed change resilience. The Fourier-Mellin transform consists of a log mapping process 151 and a Fourier transform (or inverse Fourier transform) 152.

- 25 Figs. 2 and 3 show diagrams to illustrate the log mapping operation. In Fig. 2, reference numeral 21 denotes the samples of the power spectrum of an audio frame as supplied by the Fourier transform 12 in the case that the audio signal is being played back at normal speed. For the sake of convenience, a smooth power spectrum in the range 300-3,000Hz is shown. In reality, the spectrum will generally exhibit a jagged outline. Reference numeral 22 in Fig. 2 denotes the power spectrum of the same audio frame in the

PHNL021150EPP

5

11.11.2002

case that the audio signal is being played back at an increased speed. As can be seen in the Figure, the speed change causes the power spectrum to be scaled.

Fig. 3 shows the corresponding power spectra as computed by the log mapping circuit 151. The power spectrum now represents the energy of the audio frame in a selected number of successive logarithmically spaced sub-bands. Reference numeral 31 denotes the log mapped power spectrum for the audio signal being played back at normal speed. Reference numeral 32 denotes the log mapped power spectrum for the audio signal being played back at the increased speed.

The process of log mapping can be carried out in several ways. In the embodiment, which is shown in Fig. 3, the input power spectrum is interpolated and re-sampled at logarithmically spaced intervals. In another embodiment (not shown), the samples within logarithmically spaced (and sized) sub-bands of the input power spectrum are accumulated to provide respective samples of the log mapped power spectrum.

The number of samples representing the log mapped power spectrum is chosen to be such that subsequent operations can be carried out with sufficient precision. In a practical embodiment, the log mapped power spectrum is represented by 512 samples. It will be appreciated from inspection of Fig. 3 that the log mapping operation translates the scaling (21 → 22) of the power spectrum due to the speed change into a shift (31 → 32). As long as the play back speed of the audio signal does not change within the frame period (which is a reasonable assumption in practice), the shift is the same for all coefficients.

The subsequent Fourier transform 152 translates said shift into a change of the phase of the complex Fourier coefficients. The phase change is the same for all coefficients. Thus, if the speed of the audio signal changes, the phases of all Fourier coefficients computed by Fourier transform circuit 152 change by an identical amount. In other words, the magnitudes of the coefficients as well as their phase differences are invariant to speed change. They are calculated in a computing circuit 16. As the magnitudes and phase differences are the same for positive and negative frequencies, the number of unique values is 256.

The vector of 256 magnitudes or phase differences representing the log mapped power spectrum of an audio frame is hereinafter denoted  $F(k,n)$ , where  $k=1..256$  and  $n$  is the audio frame number. In fact, the vector constitutes a speed change invariant fingerprint. However, the number of values is large, and each value requires a multi-bit representation in a digital fingerprinting system. The number of bits to represent the fingerprint can be reduced by selecting the lowest order values only. This is performed by a

PHNL021150HPP

6

11.11.2002

selection circuit 17. It has been found that the 32 lowest values (the most significant coefficients) provide a sufficiently accurate representation of the log mapped power spectrum.

The number of bits can further be reduced by subjecting the selected magnitudes or phase differences to values to a thresholding process. In a simple embodiment, a thresholding stage 19 generates one bit for each feature sample, for example, a '1' if the value  $F(k,n)$  is above a threshold and a '0' if it is below said threshold. Alternatively, a fingerprint bit is given the value '1' if the corresponding feature sample  $F(k,n)$  is larger than its neighbor, otherwise it is '0'. To this end, the feature samples  $F(k,n)$  are first filtered in a one-dimensional temporal filter 18. The present embodiment uses an even improved version of the latter alternative. In this preferred embodiment, a fingerprint bit '1' is generated if the feature sample  $F(k,n)$  is larger than its neighbor and if that was also the case in the previous frame, otherwise the fingerprint bit is '0'. In this embodiment, the filter 18 is a two-dimensional filter. In mathematical notation:

$$FP(k,n) = \begin{cases} 1 & \text{if } F(k,n) - F(k+1,n) - (F(k,n-1) - F(k+1,n-1)) > 0 \\ 0 & \text{if } F(k,n) - F(k+1,n) - (F(k,n-1) - F(k+1,n-1)) \leq 0 \end{cases}$$

When thresholding is used, each sub-fingerprint being extracted from an audio frame has 32 bits.

Although the invention has been described with reference to audio fingerprinting, it can also be applied to other multimedia signals such as images and motion video. While speed changes are often applied to audio signals, affine transformations such as shift, scaling and rotation, are often applied to images and video. The method according to the invention can be used to improve robustness to such affine transformations. In the case of a two-dimensional signal, the log mapping process 151 is changed into log-polar mapping to make it invariant against rotation as well as scaling (retaining aspect ratio). A log-log mapping makes it invariant to changes of the aspect ratio. The magnitude of the Fourier-Mellin transform (now a 2D transform) and double differentiation of its phase along the frequency axis have the desired affine invariant property.

Disclosed is a method and arrangement for extracting a fingerprint from a multimedia signal, particularly an audio signal, which is invariant with respect to speed changes of the audio signal. To this end, the method comprises extracting (12,13) from the multimedia signal a set of robust perceptual features, for example, the power spectrum of the audio signal. A Fourier-Mellin transform (15) converts the power spectrum into Fourier coefficients that undergo a phase change only, if the audio play back speed changes. Their



12.NOV.2002 10:22

PHILIPS CIP NL +31 40.2743489

No.341 P.13  
013 12.11.2002 09:22:41

PHNL021150EPP

7

11.11.2002

magnitudes or phase differences (16) constitute a speed change invariant fingerprint. By a thresholding operation (19), the fingerprint can be represented by a compact number of bits.

PHNLO21150EPP

8

11.11.2002

## CLAIMS:

1. A method of extracting a fingerprint from a multimedia signal, comprising the steps of:
  - extracting from the multimedia signal a set of robust perceptual features;
  - subjecting the extracted set of features to a Fourier-Mellin transform;
  - 5 — converting the transformed set of features into a sequence constituting the fingerprint.
2. A method as claimed in claim 1, wherein said converting step includes converting the magnitudes of the Fourier-Mellin transform.
- 10 3. A method as claimed in claim 1, wherein said converting step includes converting the derivative of the phase of the Fourier-Mellin transform.
4. A method as claimed in claim 1, wherein the multimedia signal is an audio signal and said Fourier-Mellin transform includes a one-dimensional log mapping process  
15 being applied to the set of perceptual features.
5. A method as claimed in claim 1, wherein the multimedia signal is an image or video signal and said Fourier-Mellin transform includes a two-dimensional log-polar mapping process being applied to the set of perceptual features.  
20
6. A method as claimed in claim 1, wherein the multimedia signal is an image or video signal and said Fourier-Mellin transform includes a two-dimensional log-log mapping process being applied to the set of perceptual features.
- 25 7. A method as claimed in claim 1, wherein said extracting step includes normalization of the set of perceptual features.
8. An apparatus for extracting a fingerprint from a multimedia signal, comprising:

12.NOV.2002 10:23

PHILIPS CIP NL +31 40 2743489

NO. 3 P.13  
015 12.11.2002 09:23:1

PHNL021150EPP

9

11.11.2002

- means for extracting from the multimedia signal a set of robust perceptual features;
- means for subjecting the extracted set of features to a Fourier-Mellin transform;
- means for converting the transformed set of features into a sequence constituting the fingerprint.

PHNL021150EPP

10

11.11.2002

## ABSTRACT:

Disclosed is a method and arrangement for extracting a fingerprint from a multimedia signal, particularly an audio signal, which is invariant with respect to speed changes of the audio signal. To this end, the method comprises extracting (12,13) from the multimedia signal a set of robust perceptual features, for example, the power spectrum of the

5 audio signal. A Fourier-Mellin transform (15) converts the power spectrum into Fourier coefficients that undergo a phase change only, if the audio play back speed changes. Their magnitudes or phase differences (16) constitute a speed change invariant fingerprint. By a thresholding operation (19), the fingerprint can be represented by a compact number of bits.

10 Fig. 1

PHNL021150

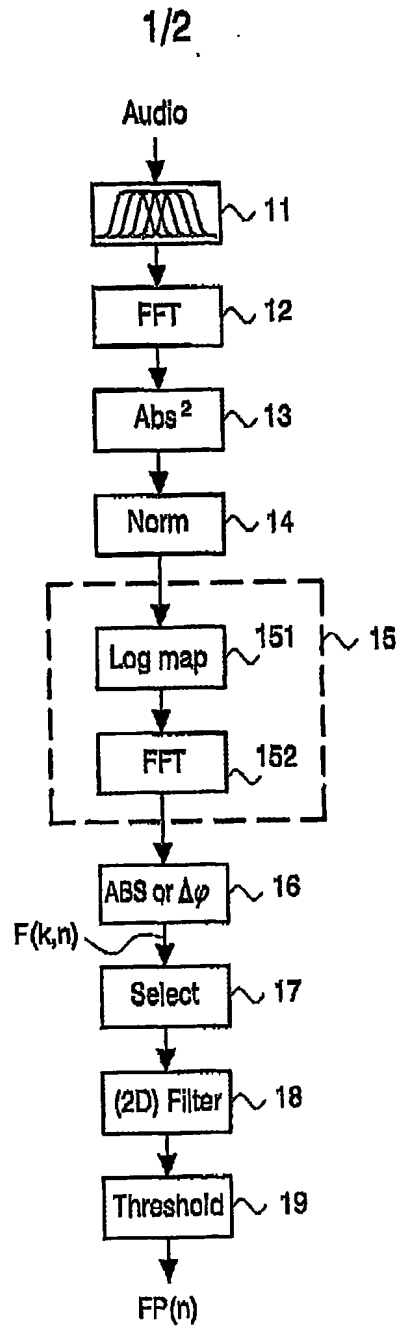


FIG. 1

PHNL021160

2/2

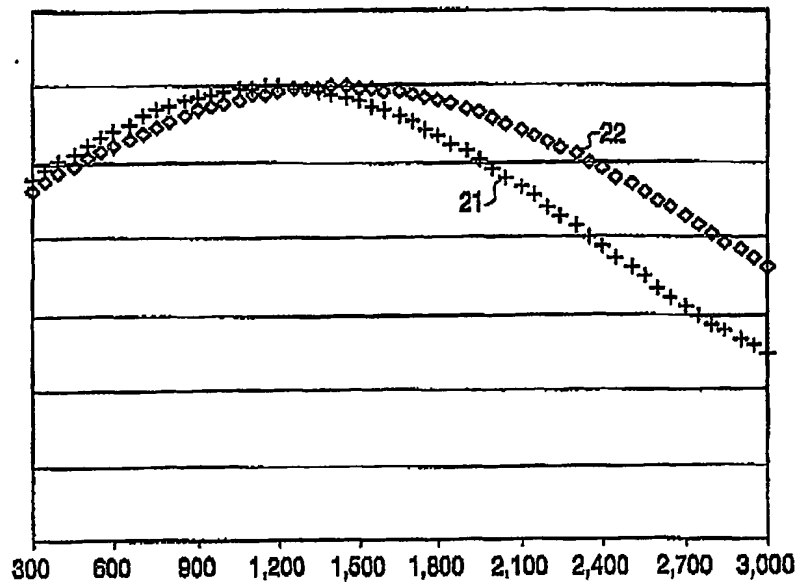


FIG. 2

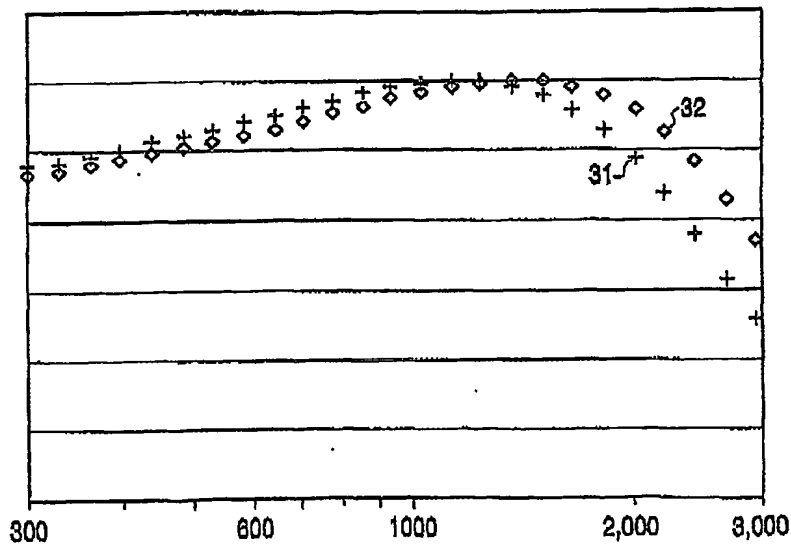


FIG. 3